















COMBIPOWER.NL

Combi Power BV
Retselseweg 6 | 5473 HC Heeswijk-Dinther
sales@combipower.nl
www.combipower.nl



KUBICA K6200

<p>MATERIAL</p> <p>Zamak</p>	<p>LOAD CAPACITY</p> <p>45 kg (n.2 hinges) 60 kg (n.3 hinges)</p> 	<p>APPLICATION</p> <p>Flush to the wall door</p> 	<p>K DISTANCE</p>  <p>K-max 4 mm</p>
<p>HINGE CENTERED ON THE DOOR LEAF</p>  <p>Max Thk 31 mm</p>	<p>OPENING ANGLE</p> <p>180°</p> 	<p>3D ADJUSTMENTS</p>  <p>Z +2.5 / -2.5 X +3 / -2 Y x1 / -1</p>	<p>NUMBER OF ROTATION AXES</p> <p>5</p> 
<p>FINISHING</p> <p>Full HD</p> 	<p>COVER MATERIAL</p> <p>Aluminum</p>  <p>Kit of cover with screws (optional)</p>	<p>TESTED WITH DOOR CLOSER*</p> 	<p>Rif. report reference</p> <p>N° R27182-20130522</p> 
<p>ift Product Quality</p> <p>Multi-axis, concealed hinges EAD 020001-01-0405</p> <p>Reg.-N°: 9000283</p> 	<p>EN 1634-1</p>  <p>30 min.</p>	<p>EN 1670</p> <p>Spray salt tested</p> <p>240 hours</p>	<p>MADE IN ITALY</p> 








*Tested with door closer models most frequently used on the market.

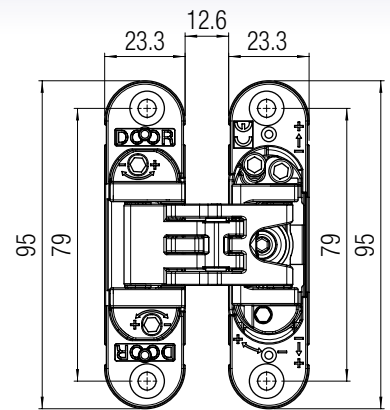

Classic Series



Finishing

Colour	Item number.
	Polished chrome K 6200 CL HD
	Satin chrome K 6200 CS HD
	Satin nickel K 6200 NS HD
	Polished gold K 6200 OR HD
	Bronze K 6200 BR HD
	White K 6200 BI HD
	Black K 6200 NR HD

For other colours please ask Krona Koblenz for feasibility




Load capacity table (see the reading guide at page 12)

K6200 - 45 Kg - N.2 hinges													
Hinge spacing (mm)**	2000	*45	*45	*45	*45	*45	*45	*45	*43	*41	39	37	36
	1950	*45	*45	*45	*45	*45	*45	*43	*42	40	38	37	35
	1900	*45	*45	*45	*45	*44	*42	40	39	37	36	36	34
	1850	*45	*45	*45	*45	*43	*41	39	38	36	35	35	33
	1800	*45	*45	*45	*44	*42	40	38	37	35	34	34	32
	1750	*45	*45	*45	*43	*41	39	37	36	34	33	32	30
	1700	*45	*45	*44	*42	40	38	36	35	33	32	31	29
	1650	*45	*45	*43	*41	39	37	35	34	32	31	30	28
	1600	*45	*45	*42	39	37	36	34	33	31	30	29	27
	1550	*45	*45	40	38	36	35	33	32	30	29	28	26
	1500	*45	*44	39	37	35	33	32	31	29	28	27	25
	1450	*45	*42	38	36	34	32	31	30	28	27	26	24
	1730	45											
	900	700	800	900	950	1000	1050	1100	1150	1200	1250	1300	
	Door leaf width (mm)**												


*Consider the 40 kg capacity as CE compliance

Milling door/jamb

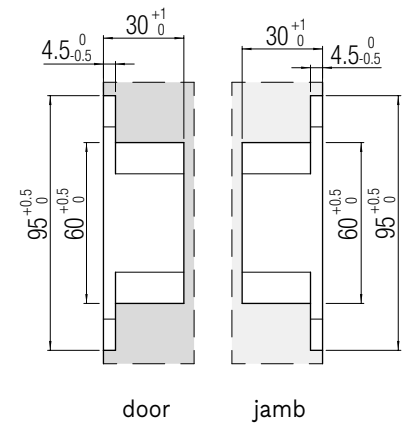


K6200 - 60 Kg - N.3 hinges													
Hinge spacing (mm)**	2000	60	60	60	60	60	59	57	54	52	50	48	
	1950	60	60	60	60	60	59	58	55	53	51	49	47
	1900	60	60	60	60	60	59	56	54	52	49	47	46
	1850	60	60	60	60	60	58	55	52	50	48	46	44
	1800	60	60	60	59	56	54	51	49	47	45	43	41
	1750	60	60	60	57	55	52	50	47	46	44	42	40
	1700	60	60	59	56	53	51	48	46	44	42	41	39
	1650	60	60	57	54	52	49	47	45	43	41	40	38
	1600	60	60	55	53	50	48	45	43	42	40	39	37
	1550	60	60	54	51	48	46	44	42	40	39	37	36
	1500	60	59	52	49	47	45	43	41	39	37	36	35
	1450	60	57	50	48	45	43	41	39	38	36	35	34
	1730	60											
	900	700	800	900	950	1000	1050	1100	1150	1200	1250	1300	
	Door leaf width (mm)**												

Installation of Hinge centered on the door leaf

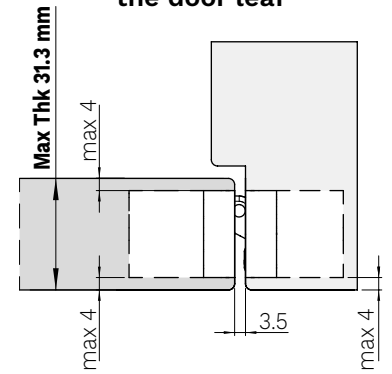



Installation of Hinge NOT centered on the door leaf

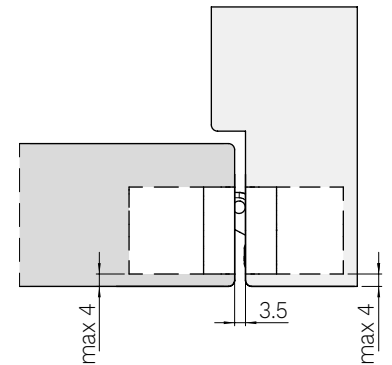

- Tested on doors: height 2100 mm - width 900 mm - opening angle 0°-90°.

**With door dimensions and max opening angle different from the tested configuration and/or with the application of other devices such as, for example, door closers/bumpers/emergency handle/dropdown seal/etc. refer to the "Installation Examples". Please note that testing for these configurations is under customer's responsibility. We specify that the combinations are the result of interpolation and not of real tests, which remain under the customer's responsibility.

Standard application

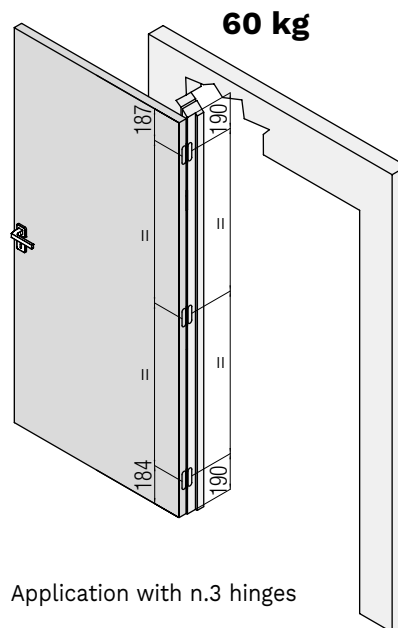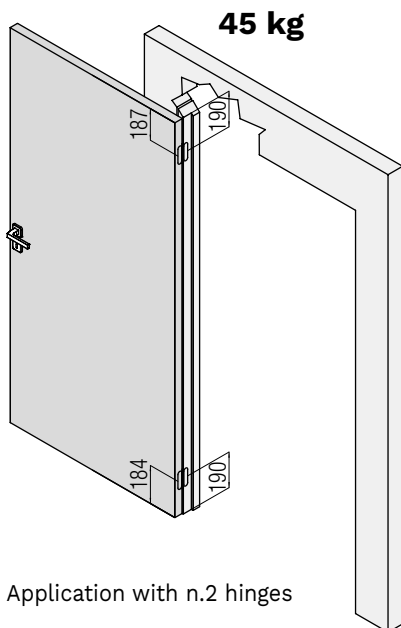

The hinge fixing is ensured by using the fixing screws indicated in our hinge assembly instructions.