

## 931.912.34.401 series: L-bended

### Features:


- Stainless steel doorhandle pair on rose.
- High frequency of use on doors which are subject to frequent violent usage; high frequency of use by public or others with little incentive to exercise care and with a high chance of misuse
- CE (**NEN-EN 1906:2012**).and tested
- **EN 1634-1:2014**
- Applicable to both wood & metal doors.
- Suitable for use on fire doors.



### Specifications:

- Grade 4
- Spring support rose
- 8 mm square follower 30 degree cam
- Doorthickness 37-65 mm
- Incl. fixing kit

### Accessories:

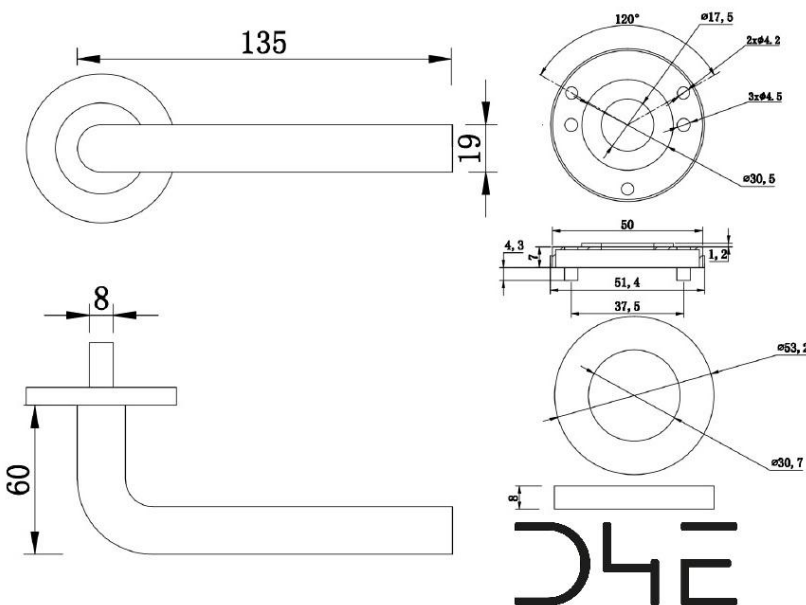

**intertek**  
Total Quality. Assured.

EN 1906:2012

|     |   |   |   |   |   |   |   |
|-----|---|---|---|---|---|---|---|
| 3/4 | 7 | — | — | 0 | 3 | 0 | B |
|-----|---|---|---|---|---|---|---|